


Typhoon™ Series Process Gas Cells

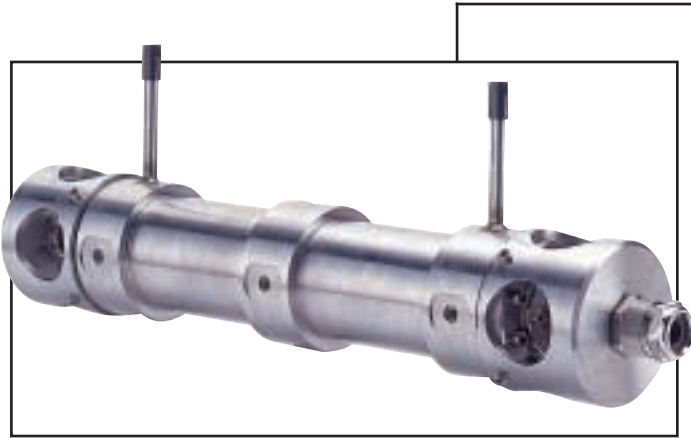

The Typhoon™ series of gas cells is designed for the on-line measurement of the spectra of process gases and vapors using fiber optics. Installed on fast by-pass loops directly on the plant, Typhoon™ allows for real-time remote monitoring and control. Superior optical design, state-of-the-art sealing technology and rugged construction are combined with precision manufacturing to ensure many years of reliable, high performance.

Typhoon™ process gas cells are user-configured to ensure exact matching with process requirements. Temperatures as high as 280°C and pressures as high as 1500 p.s.i. can be handled with the standard cell.

A choice of body materials is available to ensure compatibility with a wide variety of process streams. Optical designs can be configured for near infrared (NIR) or UV - Visible regions, and further optimisation is available for specific areas of the spectrum. A choice of high performance perfluoroelastomer seals ensures excellent protection against leaks. Metal covers can be specified to protect fiber fittings against the effects of condensation and mechanical impact.

A cleaning port can be specified to allow the easy cleaning of the windows without the need to remove the cell.

A range of configurations and options is available to ensure that Typhoon™ series process gas cells easily exceed the rigorous demands of industrial process monitoring.

Advantages

- Allows remote process monitoring and control
- Improves process efficiency leading to cost savings
- Reproducible and safe sampling

Applications

- Oil refining
- Petrochemicals
- Chemicals
- Pharmaceuticals
- Food
- Pilot plants



Typhoon™ Process Gas Cells - Standard Specifications

Optical range:	NIR or UV-Visible
Pathlength:	20cm, 50cm (contact Specac for other options)
Window material:	Sapphire
Body material:	Stainless Steel 316L or Hastelloy® C276 (other options include Zirconium and Titanium. Contact Specac for details)
Maximum temp:	280°C
Maximum pressure:	1500 p.s.i.
Seals:	Choice of perfluoroelastomers
Cell bore:	10mm
Fiber diameter:	600µm (contact Specac for other options)
Inlet/outlet tubing:	1/4" (others available upon request)
Thermocouple well:	1/8" B.S.P. thread

Optional Features

- Protective hoods for fiber fittings (to I.P. 65)
- Window clean-out ports

Gas Cell Ordering Information

Typhoon™ series process gas cells are user-configured.
Contact Specac to discuss your specific requirements.

P/N 30100 Typhoon™ T20 - 20cm Process Gas Cell in Stainless Steel 316L

P/N 30110 Typhoon™ T50 - 50cm Process Gas Cell in Stainless Steel 316L

P/N 30120 Typhoon™ T20 - 20cm Process Gas Cell in Hastelloy® C276

P/N 30130 Typhoon™ T50 - 50cm Process Gas Cell in Hastelloy® C276

Client to specify:

- Wavelength range
- Window seals material
- Optional features

smiths
A part of Smiths Group plc

Specac



SPECAC LIMITED,
River House, 97 Cray Ave, St. Mary Cray,
Orpington, Kent BR5 4HE U.K.
Tel : +44 (0)1689 873134
Fax : +44 (0)1689 878527
Registered No. 1008689 England

SPECAC INC.,
410 Creekstone Ridge,
Woodstock, GA 30188 U.S.A.
Toll Free +1 800 447 2558
www.specac.com
Specac is part of Smiths Group plc